



# Rise Vision Media Player Hardware as a Service

Simplify your digital signage and eliminate upfront CAPEX costs with the Rise Vision Media Player Hardware as a Service from Rise Vision.



Leave the management and support of your digital signage media player to us with the Rise Vision Media Player Hardware as a Service, our subscription media player.

## White Glove Service

We provide support, handle software updates, and ensure an easy digital signage experience.

- ✓ **Managed by Rise Vision:** Focus on achieving your goals, and leave the hardware to us.
- ✓ **Supported by Rise Vision:** Get your media player and software support from Rise Vision.
- ✓ **Regular Upgrades:** You can refresh your Rise Vision Media Players at renewal.

## High Performance


The Rise Vision Media Player takes minutes to set up, flawlessly handles demanding schedules, and is designed for digital signage.

- ✓ **Setup in Minutes:** Connect the media player to your display to start using it immediately.
- ✓ **Optimized for Rise Vision:** Run demanding schedules of animated templates and video.
- ✓ **Single Purpose Device:** Locked down to reduce the risk of unauthorized network access.

## Lower Upfront Costs

Lower upfront costs and simplify procurement by combining your Rise Vision software and hardware into subscriptions.

- ✓ **Predictable Budgets:** Know your exact hardware costs each year for more accurate budgets.
- ✓ **Simplified Procurement:** Combine your Rise Vision software and hardware in one order.
- ✓ **Scale Your Network:** Add media players and don't worry about sunk hardware costs.

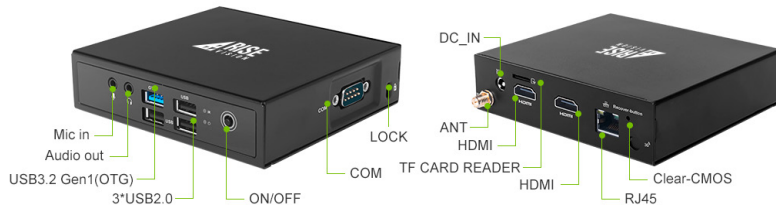

# Rise Vision Media Player Hardware as a Service

<b>CPU</b>	CPU	Rockchip RK3399
	Frequency	1.80 GHz
	Processing Units	2 Cores Cortex-A72 & 4 Cores Cortex-A53
	TDP	6W
<b>Memory</b>	Size	4 GB
	Type	Onboard LPDDR4-2133 MHz
<b>Storage</b>	Onboard	32 GB, Onboard eMMC
	Socket	1 x TF Card reader
<b>Display</b>	GPU	Mali-T860MP4
	Graphic Engine	OpenGL ES1.1/2.0/3.0/3.1, OpenCL, Support AFBC (ARM Frame Buffer Compression)
	Multi-Media	4K VP9 decoders 4K 10bits H.265 video decoders 1080P VC-1, MPEG-1/2/4, VP8 video decoders
	Display Interface	1 x HDMI (Max. 4096 x 2160 @60 Hz) 1 x HDMI (Max. 2560 x 1440 @30 Hz)
<b>I/O interface</b>	USB	1 x USB3.2 Gen1 (OTG), 3 x USB2.0
	Serial Port	1 x RS232
	Audio	1 x MIC-IN, 1 x AUDIO-OUT
	Button	1 x Power on, 1 x Recovery
	Antenna	1 x Connector for Wi-Fi/BT 1 x Connector for 3G/4G (Reserved)
<b>Network</b>	Network Controller	1 x Pef7071 PHY
	Ethernet Interface	1 x RJ45
	Wi-Fi/BT	Onboard Wi-Fi/BT module
	Mobile Network	1 x Full-size Mini-PCIe for 3G/4G 1 x SIM Slot
<b>System</b>	Watchdog Timer	NA
	Auto Power On	Yes
	RTC	Set up independently every day, a week as a cycle
	Remo on	NA
	Power Requirement	DC-IN, 12 V/2.08 A
	Dimensions	116 mm x 106 mm x 30 mm (4.57" x 4.17" x 1.18")
	Construction	Metal, Black
	Operating System	Android 11
	Operating Temperature	0°C ~40°C (32°F~104°F) @0.7m/s Air Flow
	Humidity	95% @ 40°C (non-condensing)
Certifications	CE, FCC Class B	